


MAGELLAN™ RS-232 PARAMETERS

Programming codes are for the following products:


- Magellan™ 800i
- Magellan™ 1000i
- Magellan™ 1100i
- Magellan™ 1400i
- Magellan™ 2200
- Magellan™ 2200E
- Magellan™ 2300
- Magellan™ 2300E
- Magellan™ 3200
- Magellan™ 3300
- Magellan™ 8100
- Magellan™ 8200
- Magellan™ 8300
- Magellan™ 8400
- Magellan™ 8500
- Magellan™ 8500XT
- Magellan™ 8500XTS
- Magellan™ 9500

Baud Rates


Baud Rate = 1200

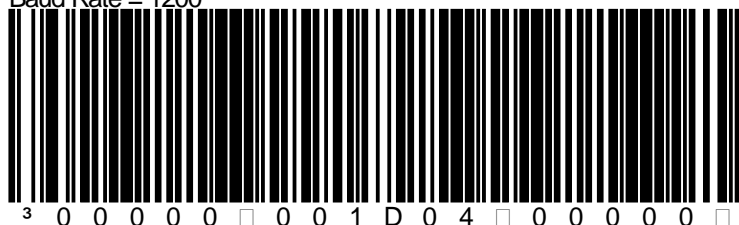


Baud Rate = 2400

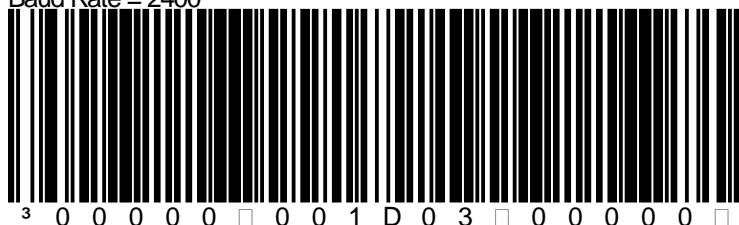


Baud Rate = 4800

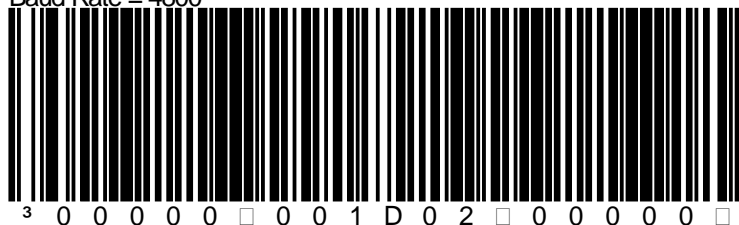


Baud Rate = 9600

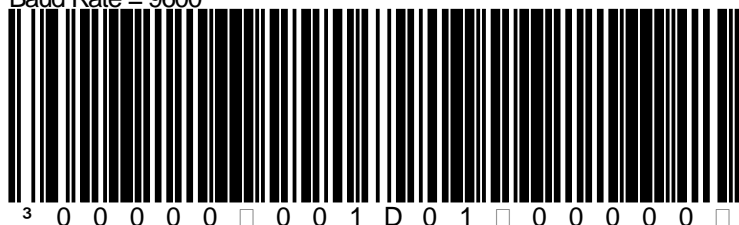


Baud Rate = 19200

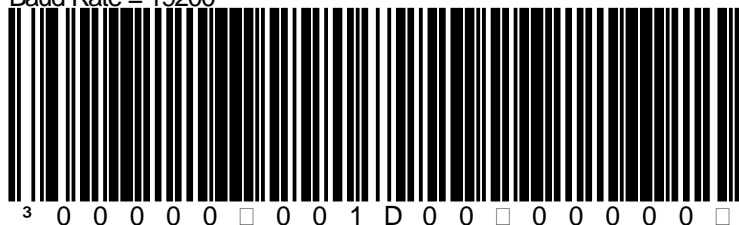


Baud Rate = 38400

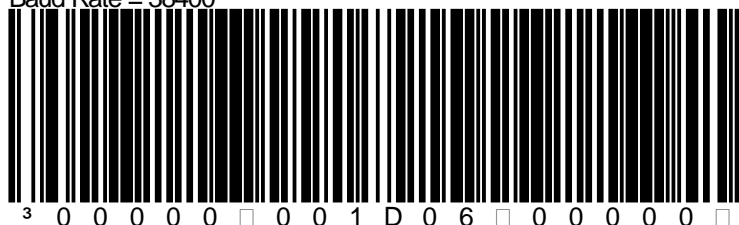

Baud Rate = 57600

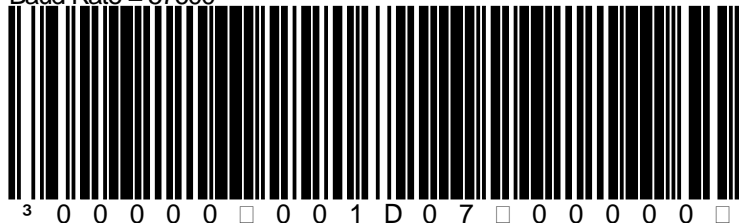


Baud Rate = 115200

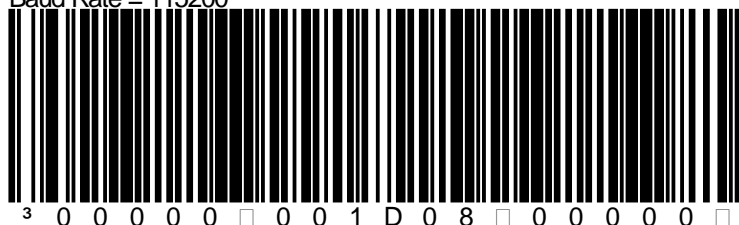


Data Bits

Data Bits = 7

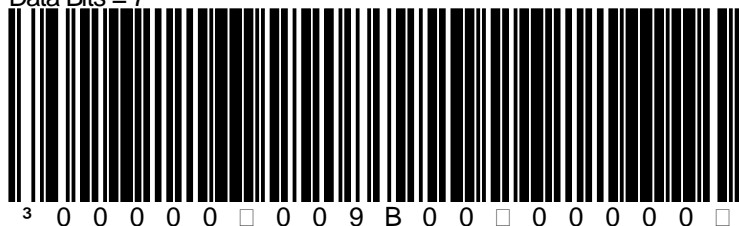


Data Bits = 8

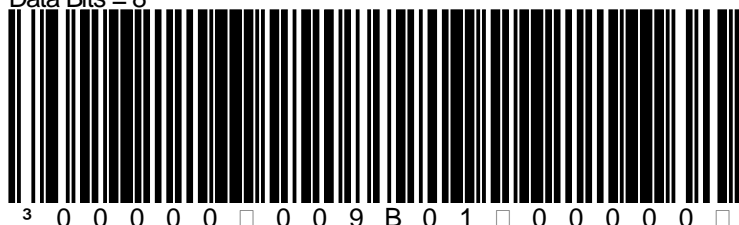


Stop Bits

Stop Bits = 1

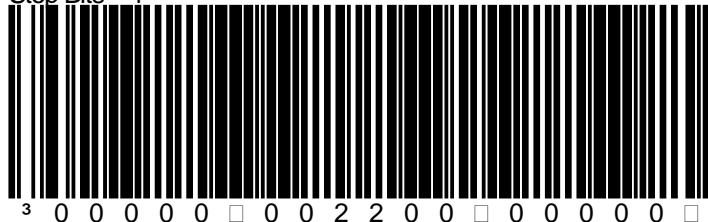


Stop Bits = 2

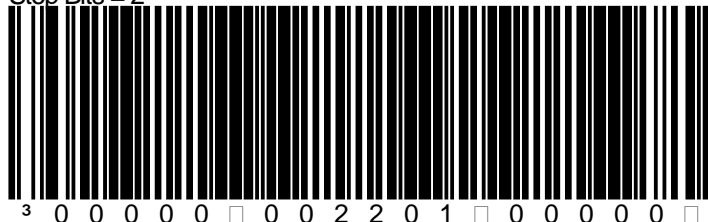

Parity

Parity = None

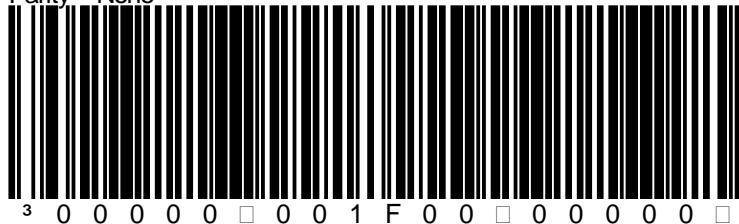

Parity = Even

