

MAGELLAN™ CONNECTING TO CASH REGISTER EXPRESS

Programming codes are for the following products:

- Magellan™ 8100
- Magellan™ 8200
- Magellan™ 8300
- Magellan™ 8400
- Magellan™ 8500
- Magellan™ 8500XT
- Magellan™ 8500XTS
- Magellan™ 9500

Cash Register Express RS232 Single Cable Setup


- Log into Cash Register Express Application
- Click on '4" Set Up (green button)
- Click on 'G" Set up Screen (blue button)
- Click on Hardware tab



-Locate 'Weight Scale Primary':

Determine scanner/scale port connection and select comport.

Open drop down 'Primary Scale Type', Select on Metrologic MS2020

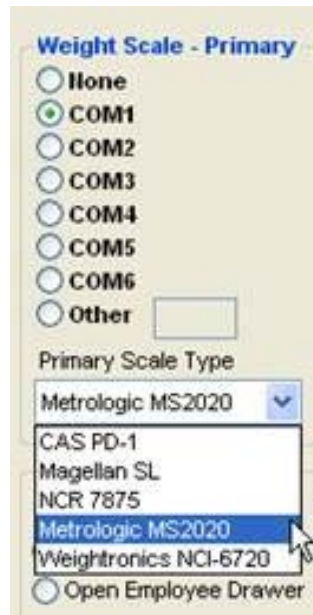


-Click on Update

-Exit set up screens.



Select the interface for a Magellan™ 8300, 8400, or 8500XT with this code


RS-232 Single Cable Interface

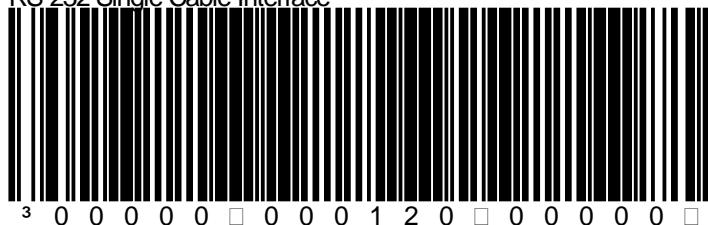

3 0 0 0 0 0 0 0 0 0 1 2 0 0 0 0 0 0 0 0 0 0

Select the interface for a Magellan™ 8100, 8200, 8500 or 9500 with this code


RS-232 Single Cable

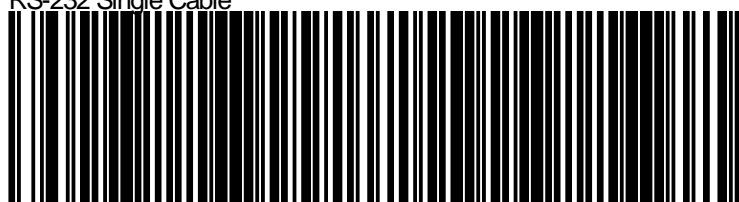

3 0 0 0 0 0 0 0 0 0 1 E 2 0 0 0 0 0 0 0 0 0 0


Scan the remaining codes in order

STX Character = STX

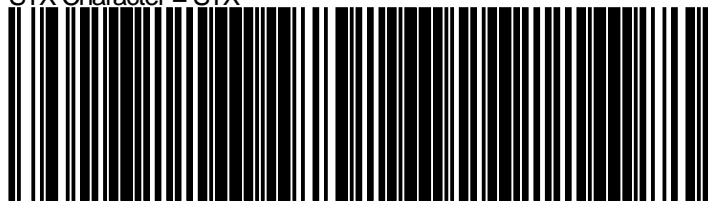

3 0 0 0 0 0 0 0 0 4 7 9 0 2 0 0 0 0 0 0 0 0


ETX Character = ETX

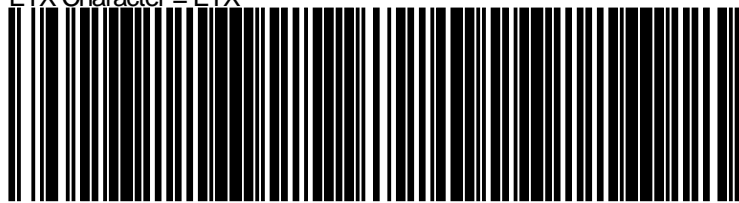


3 0 0 0 0 0 0 0 0 4 7 A 0 3 0 0 0 0 0 0 0 0




Label ID Disable

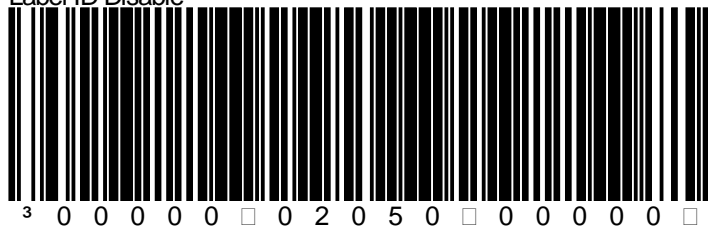


Stop Bits = 1

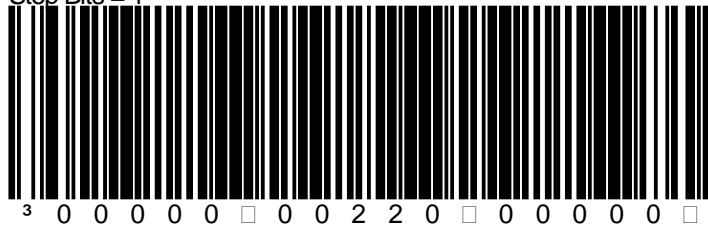

Data Bits = 8

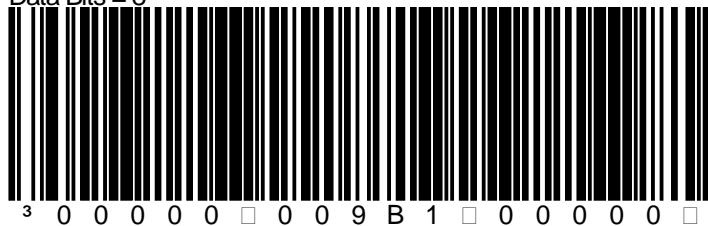


Parity = None

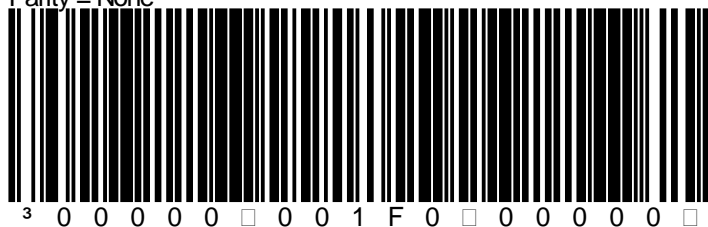

We have the option to enable or disable the Remote Display with the following codes.

Remote Display Disable

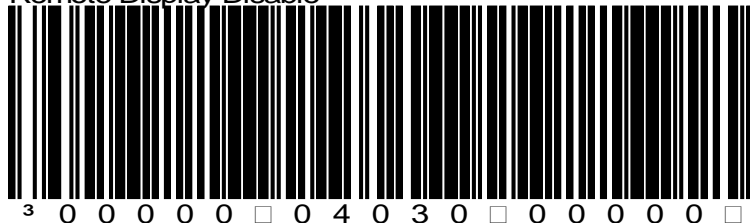

Remote Display Enable

