


94ACC0364 CABLE COVER, speaker, Pwr, USB 2.9 m cb

General Features

The Cable Cover extends the VMC with the possibility to access USB & the 12/24/48 VDC power supply when the cable cover is closed.

Assembling the Cable Cover

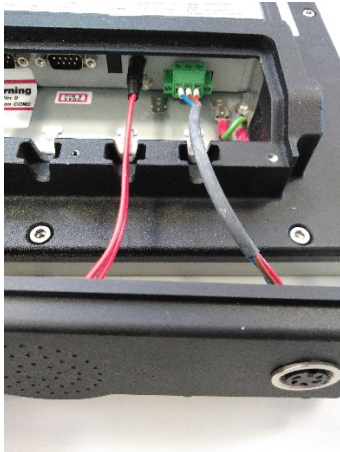

1. Connect the USB cable, the power supply, the speaker cable and the ground cable on the backside of the VMC.



2. Put the Cable Cover USB access in the groove of the VMC.

3. Push the Cable Cover.
4. Fix the Cable Cover with 4 screws and fasten them with 1 Nm torque.
5. Connect the Power cord 12/24/48 VDC, 2.9m to the Cable Cover and screw it until it's securely fixed.

Cable pinout:

- a. IGN (ignition) brown
- b. + (12/24/48 VDC) grey
- c. - (GND) black.

