


CONNECTING A MAGELLAN™ TO A GILBARCO TERMINAL

Programming codes are for the following products:


- Magellan™ 800i
- Magellan™ 1000i
- Magellan™ 1100i
- Magellan™ 1400i

Scan from top to bottom


Interface = RS-232

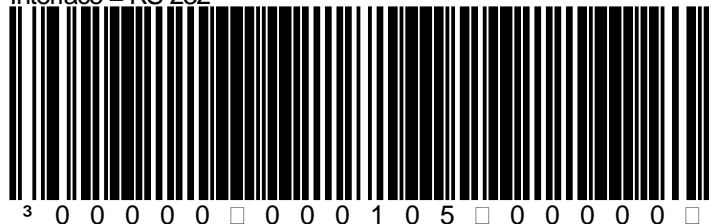


Baud Rate = 2400

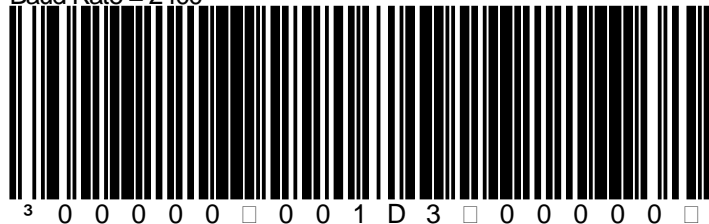


Parity = Even

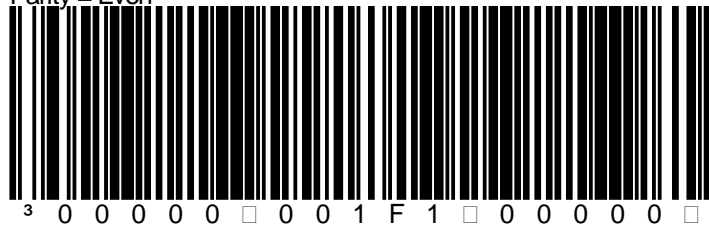

Software Flow Control = Enable

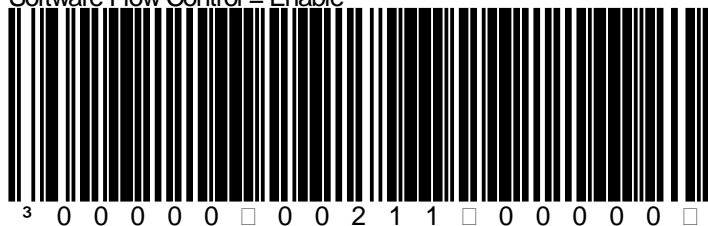

Stop Bits = 1

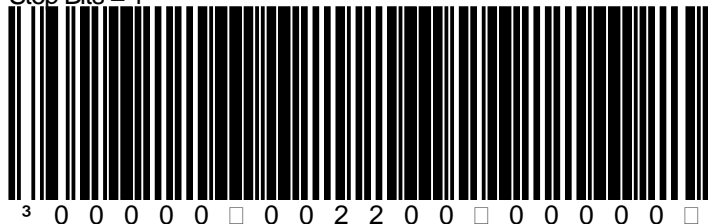

Data Bits = 7

