


MAGELLAN™ 1D CONNECTED TO A VERIFONE RUBY TERMINAL

Programming codes are for the following products:


- Magellan™ 800i
- Magellan™ 1000i
- Magellan™ 1100i
- Magellan™ 1400i

The Ruby Terminal can be configured with different settings than what is listed on this sheet, please keep in mind this is the most commonly used configuration but may differ from the setting on your terminal.

Interface = RS-232

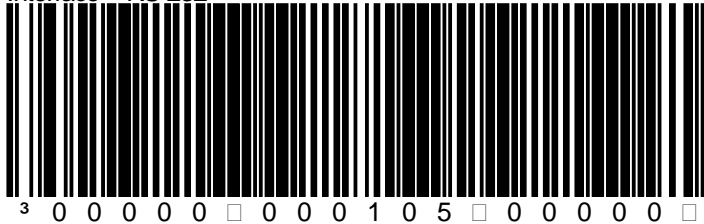

Baud Rate = 1200

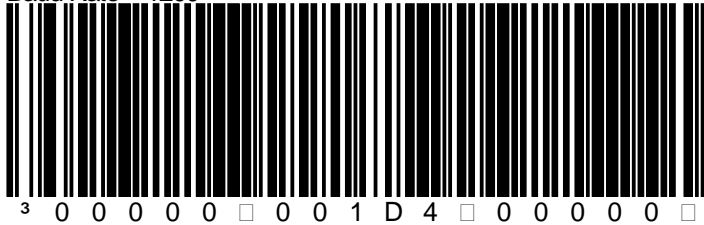

Expand UPC-E to A

