


MAGELLAN™ 2D CONNECTED TO A VERIFONE RUBY TERMINAL

Programming codes are for the following products:

- Magellan™ 800i
- Magellan™ 1000i
- Magellan™ 1100i
- Magellan™ 1400i


The Ruby Terminal can be configured with different settings than what is listed on this sheet, please keep in mind this is the most commonly used configuration but may differ from the setting on your terminal.

Interface = RS-232

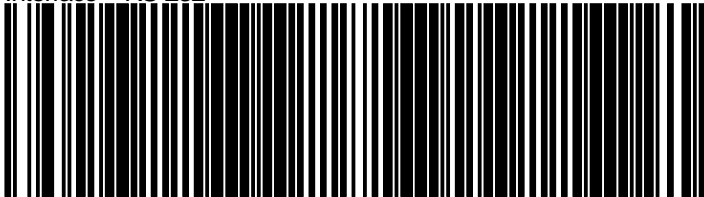


3 0 0 0 0 0 □ 0 0 0 1 0 5 □ 0 0 0 0 0 □

PDF417 Label ID = X

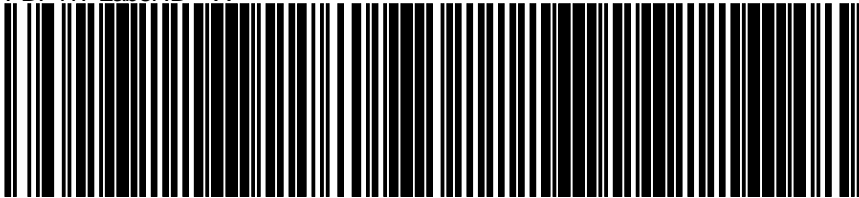

3 0 0 0 0 0 □ 0 5 A 9 5 8 0 0 0 0 0 0 □ 0 0 0 0 0 0 □

Expand UPC-E to A

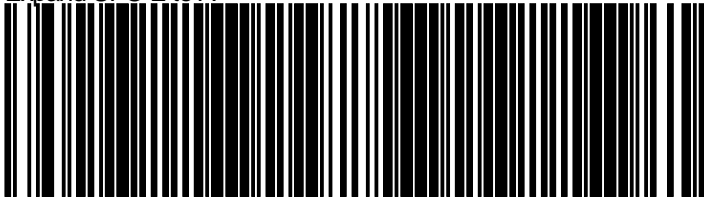

3 0 0 0 0 0 □ 0 0 4 1 1 □ 0 0 0 0 0 0 □

